

CENTRIFUGAL FANS

Forward Curved Multi Vane Fans

The Forward Curved impeller is characterised by a large number of shallow blades curved forward in the direction of rotation. The impeller width to diameter is greater than a backward inclined impeller.

This extra width enables the fan to produce high flow rates at low pressures. The relatively low tip speed requirement for a particular flow rate makes this fan a low noise option.

Typical industries include :- General ventilation, Heating & ventilation, Furnace circulation.



TECH/SPEC

arrangement

Centrifugal fans are available in either Right Hand (RD) or Left Hand (LG) rotation. Discharge orientation can be any of the standard Eurovent & ISO angles, along with any angle in between as a special design.

FCM types are available in Single Inlet Single Width (SISW), Double Inlet Double Width (DIDW) & Plug Fan configurations.

Multiple drive arrangements are available including :- v / belt drive, direct coupled (drive through coupling) & direct drive (fan impeller mounted directly on the motor shaft).

Various bearing / impeller arrangements are available including :- Overhung impeller & impeller between bearings.

Fan inlets can be open, ducted or fitted with an inlet box.

ATEX

ATEX (II 2/3/G/D T1-T6) specification fans available for hazardous areas.

motors

In most instances foot mounted T.E.F.C Electric motors are fitted.

The common voltages are 220, 220/380, 380, 240/415 and 460. Motors can be wound for any voltage / frequency and also for dual voltage.

The use of standard foot mounted motors of this type guarantees interchangeability in most countries of the world with machines of similar speed/power.

EExd, EExnA, single phase, 2/3 speed and company specification motors can always be obtained.

extra features

Flexible Connections
Inlet & Discharge Guards
Anti-Vibration Mountings
Insulated Casings

Acoustic Enclosures
Vibration & Condition Monitoring
Attenuators
I.V.C. / Dampers

finish

Standard – Zinc Phosphate


Optional – Epoxy Paint or Hot Dipped Galvanised or Stainless Steel

notes


It must be noted that all these fans have an overloading power characteristic, where power increases with flow rate, up to a maximum power at maximum flow. Care must be taken not to over estimate the system pressure.

USEFUL INFORMATION


Standard Fan Arrangement




ARRANGEMENT 1
General overhung pulley drive with bearings mounted on full depth pedestal.




ARRANGEMENT 2
Impeller directly mounted on motor shaft and all mounted on full depth pedestal.

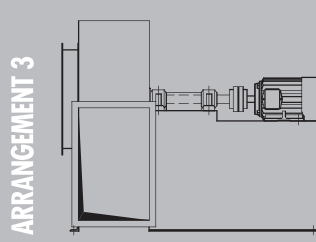


ARRANGEMENT 3
Impeller mounted on its own shaft and directly driven through flexible shaft coupling on full depth pedestal.

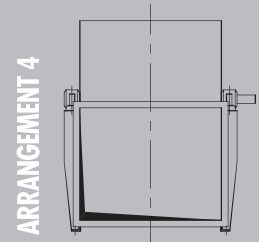


ARRANGEMENT 4
Double inlet, double width. Commonly known as D.I.D.W. with impeller mounted between bearings (both in airstream).




ARRANGEMENT 5
Single inlet, single width. Commonly known as S.I.S.W. with impeller mounted between bearings.



ARRANGEMENT 6
Compact belt drive unit widely used for space saving purposes on site.




ARRANGEMENT 6A
Compact belt drive unit used as an option to Arrangement 6.

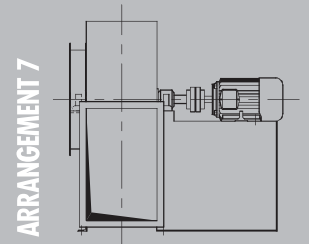


ARRANGEMENT 7
Single inlet single width with impeller mounted between bearings and directly driven through flexible coupling.

Standard Handings

As viewed from drive side

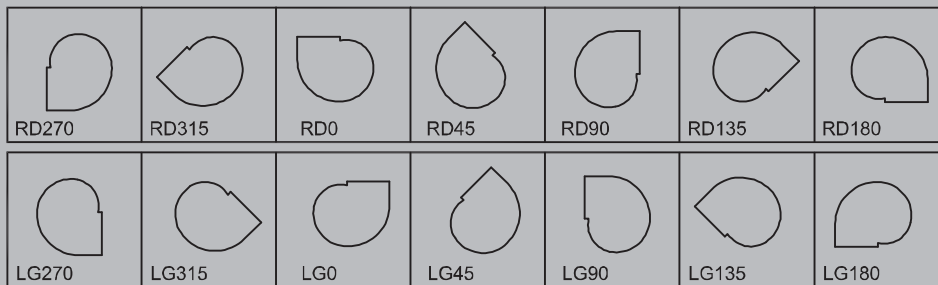

Standard Motor Positions

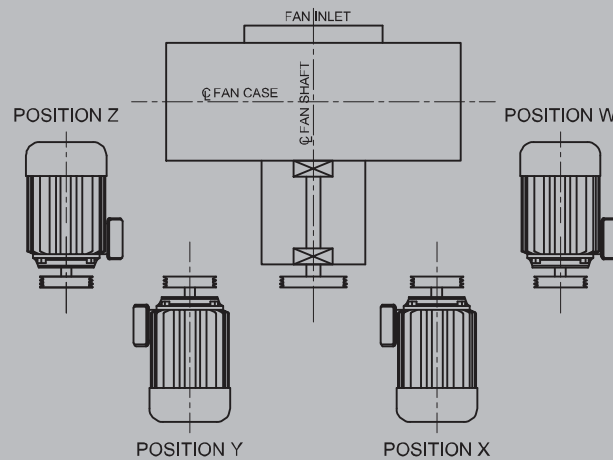

Airstream works, Blackmoorfoot Rd, Crosland hill,
Huddersfield, West Yorkshire HD4 7AA

Tel. +44 (0) 1484 462 777 sales@fanmanufacturers.com
Fax. +44 (0) 1484 462 888 www.fanmanufacturers.com



**WOODCOCK
& WILSON LTD**
FANMANUFACTURERS.COM